




Smoke/Heat Detector

Hush/Test Button



Battery Compartment

Mounting Holes (2)

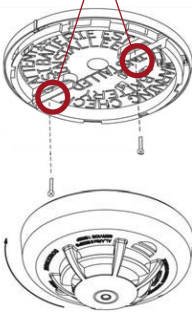


1 Remove the alarm from its base by twisting it counter-clockwise.

2 Use the two provided screws and anchors to mount the bracket to the ceiling or wall. Maneuver the base so the screws are at the elbow of the screw slots and secure.

» It's recommended to place a detector in every bedroom, outside of sleeping areas and at the ends of each hallway. Place a detector in each story of your home.

» Do not mount in the kitchen, attic, within 6 feet of bathrooms, in a garage or workshop.

» Mount the bracket at least 4-6 inches away from the point that the wall and ceiling meet.

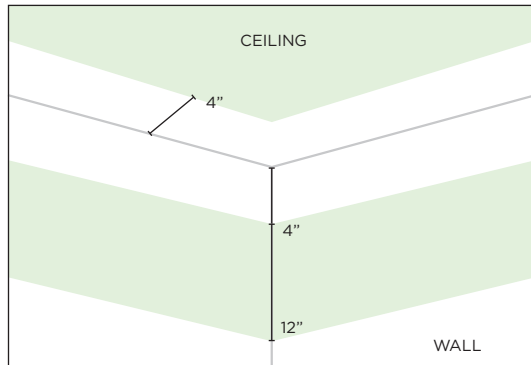

3 Insert 3 AAA Energizer E92 batteries in the battery compartment.

4 Align so that the notch on the alarm is slightly offset from the mounting base tamper release tab. Connect the alarm to the base with a slight clockwise turn until it clicks into place.