

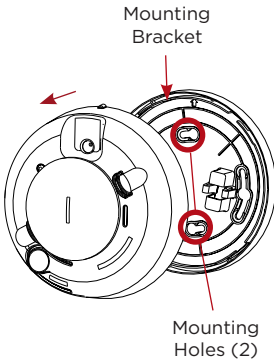



Smoke Detector

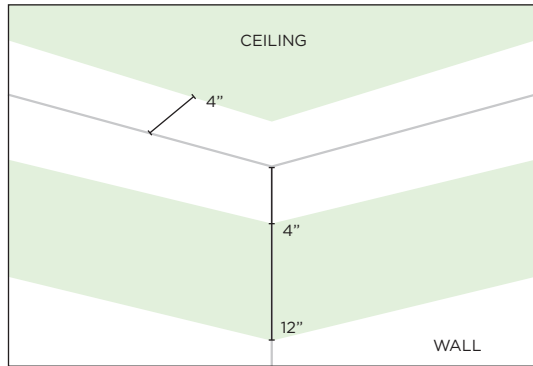

- 1 Remove mounting bracket from the main unit.
- 2 Use the two provided screws to mount the bracket to the ceiling or wall. It's recommended to place a detector in every bedroom, outside sleeping areas and the ends of each hallway, in each story of your home.
 - » Do not mount in the kitchen, attic, within 6 feet of bathrooms, in a garage or workshop.
 - » Mount the bracket at least 4-6 inches away from the point that the wall and ceiling meet.
 - » Do not mount on the wall more than 12 inches away from the ceiling except in vaulted rooms (but not within 3 feet of the vault peak).



- 3 Insert the batteries into the smoke detector and replace the battery cap. You may get a "tamper" warning from the control panel while the cover is off, which is normal.
- 4 Align the tab on the side of the smoke detector with the arrow on the mounting bracket and connect them with a slight clockwise turn.